

ACTIVE POWER (WATT) TRANSDUCER

AW

FEATURES

- Accuracy $\pm 0.2\%$ RO.
- Excellent long term stability(4~20mA, 750 Ω)
- Precision measurement even for unbalance system
- Precision measurement even for distorted wave
- Measuring reverse watt is available
- High impulse & surge protection (5KV)
- The case can be mounted on a 35mm rail which complies with DIN 46277



SPECIFICATION

OUTPUT


DC Output Range	Load Resistance	Output Resistance	Output Ripple	Response Time
0~1V	$\geq 500 \ \Omega$	$\leq 0.05 \ \Omega$	$\leq 0.5\% \text{ RO.}$ (peak)	$\leq 400\text{ms.}$ 0~99%
0~5V	$\geq 500 \ \Omega$			
1~5V	$\geq 500 \ \Omega$			
0~10V	$\geq 500 \ \Omega$			
0~1mA	0~15K Ω	$\geq 20\text{M} \ \Omega$		
0~10mA	0~1500 Ω	$\geq 5\text{M} \ \Omega$		
0~20mA	0~750 Ω			
4~20mA	0~750 Ω			

Accuracy: $\pm 0.2\%$ Rated of Output
 Input frequency: 50HZ 3HZ or 60HZ 3HZ
 Input burden: $\geq 0.1\text{VA}$ (ampere input)
 $\leq 0.2\text{VA}$ (voltage input)
 Aux. power supply: AC 110V $\pm 15\%$, 50/60HZ
 AC 220V $\pm 15\%$, 50/60HZ
 DC 24V, 48V, 110V, +15%, -10%
 Power effect: $\leq 0.1\%$ RO.
 Power consumption: $\leq 4\text{VA}$, $\leq \text{DC } 3\text{W}$
 Waveform effect: $\leq 0.2\%$ RO. at distortion factor 15%
 Output load effect: Current output $\leq 0.1\%$ RO.
 Voltage output $\leq 0.05\%$ RO.
 Electromagnetic balance effect: $\leq 0.1\%$ RO.
 Mutual interference effect: $\leq 0.1\%$ RO. between element
 Magnetic field strength: 400A/M. $\leq 0.2\%$ RO.
 Span adjustment range: $\geq 5\%$ RO.
 Zero adjustment range: $\geq 1\%$ RO.
 Operating temperature range: 0~60°C
 Storage temperature range: -10~70°C
 Temperature coefficient: $\leq 100\text{PPM}$ from 0 to 60°C
 Max. relative humidity: 95%
 Isolation: Input/output/power/case
 $\geq 100\text{M} \Omega$, DC 500V
 Insulation resistance: Between input/output/power/case
 Dielectric withstand voltage: AC 3KV, 60HZ, 1 min.
 Impulse withstand test: 5KV, 1.2 X 50us
 Performance: Common mode & differential mode
 Safety requirements: Designed to comply with IEC688
 IEC 414, BS5458


DESCRIPTION

Model : **AW-1** for 1 ϕ 2W, active power (watt)
AW-3 for 3 ϕ 3W, active power (watt)
AW-3A for 3 ϕ 4W, active power (watt)

A wide range of transducers to measure all forms active power, in both balanced and unbalanced, single or 3 phase system. They utilize the well prove "time division multiplication" method of measuring instantaneous power over a wide range of input waveforms. The circuit diagram shown measured voltage is modulated by circuit of an oscillator. Square wave pulses from a multi-vibrator circuit, with a mark-space ratio varied by the measured voltage and amplitude by the measured current, are fed to an integrator an output amplification circuit. The dc signal produced is then directly proportional to power input-Watts.

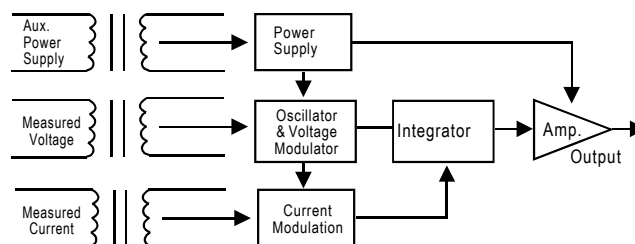

INPUT - OUTPUT CURVE

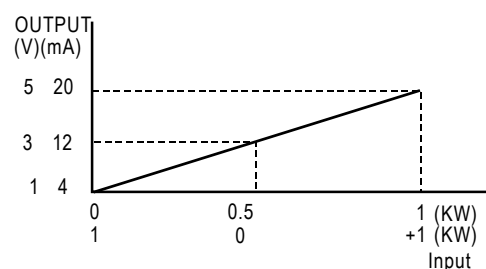

SPECIFICATION

INPUT

Input Range				Max. Input Over Capability
Circuit	Amp	Voltage	Basic Watt	
Single Phase	5A	110V(120V)	0~0.5KW	Ampere: 3 X rated continuous 10 X rated 10 sec. 50 X rated 1 sec. Voltage: 1.5 X rated continuous 2X rated 10 sec. 4X rated 2 sec.
		220V(240V)	0~1KW	
3-Phase 3-Wire	5A	110V(120V)	0~1KW	
		220V(240V)	0~2KW	
3-Phase 4-Wire	5A	190V/120V (208/120V)	0~1.5KW	
		380V/220V (416/240V)	0~3KW	

ACTIVE POWER (WATT) TRANSDUCER

ORDERING MODEL MAKE UP

Model _____

AW-1 for 1 ϕ 2W
AW-3 for 3 ϕ 3W
AW-3A for 3 ϕ 4W

Input Current _____

5 : 5A
O : Option

Input voltage _____

1 : 110V (120V)
2 : 220V (240V)
3 : 190V/110V (208V/120V)
4 : 380V/220V (416V/240V)
O : Option

Input Frequency _____

5 : 50HZ $\pm$ 3HZ
6 : 60HZ $\pm$ 3HZ
O : Option

Output Range _____

V1 : 0~1V(-1~0~1V) A1 : 0~1mA(-1~0~1mA)
V2 : 0~5V(-5~0~5V) A2 : 0~10mA(-10~0~10mA)
V3 : 1~5V(1~3~5V) A3 : 0~20mA(0~10~20mA)
V4 : 0~10V(0~5~10V) A4 : 4~20mA(4~12~20mA)
O : Option

Aux. Power Supply _____


A : AC110V C : DC24V
B : AC220V D : DC48V
O : Option E : DC110V

Reverse Required _____


Y : Yes
N : No

*Remark: The value in parentheses is the output of Reverse watt be required.

THE OUTSIDE DIMENSION

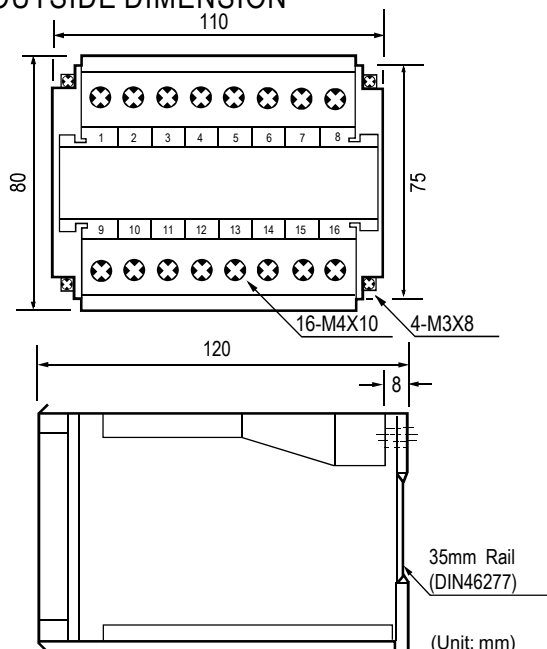


PANEL MOUNTING HOLES

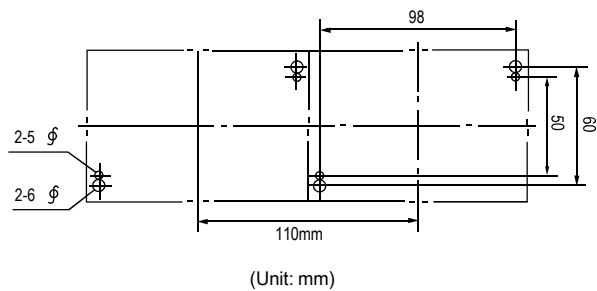


CONNECTION DIAGRAM

AW-1 (1 ϕ 2W)

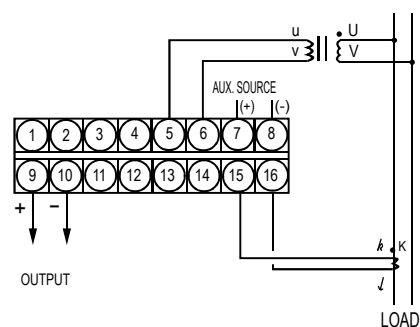

AW-3 (3 ϕ 3W)

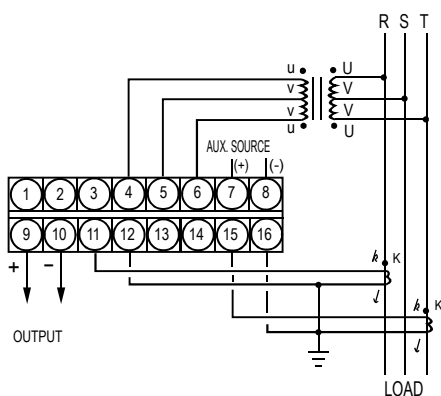

AW-3A (3 ϕ 4W)

