

# 5-Digit, Microprocessor-based Panel Meter

(Dual inputs -- MATHS -- 2--4 alarms & RS485)

# AM5H-B

## FEATURES

- Accuracy:  $\pm 0.1\%$  F.S.  $\pm 1$  digit (DC);  $\pm 0.2\%$  F.S.  $\pm 1$  digit (AC)
- Measuring AC, DC Voltage / AC, DC Current for mathematics (+, -, x, /)
- High brightness 0.8" LED display range: -19999~99999; decimal point selectable
- Max. Hold / Data Hold / Reset / 2~4 Alarms (Hi or Lo) programmable / RS-485 communication optional (The above options can exist together)
- High stability, non-flammable case (PC), high safety
- CE approval



## ORDER INFORMATION: AM5H-B - [Code 1] - [Code 2] [Code 3] - [Code 4] [Code 5] [Code 6]

Code 1	Input Type
D	DC
A	AC AVG
M	AC TRMS

Code 2	I/P 1
1	0~50mV
2	0~10V
3	0~300V
4	0~20mA
5	4~20mA
6	0~2A
7	0~5A
O	Option

Code 3	I/P 2
1	0~50mV
2	0~10V
3	0~300V
4	0~20mA
5	4~20mA
6	0~2A
7	0~5A
O	Option

Code 4	Aux. Power
A	AC/DC 100~240V
B	DC 12V
C	DC 24V
D	DC 30~90V

Code 5	Alarm Output
N	None
R2	2 Relays
R3	3 Relays
R4	4 Relays
O2	2 Open Collect
O3	3 Open Collect
O4	4 Open Collect


Code 6	RS-485
N	None
Y	Yes

\*\*1:3 Relay type only offers A(NormalOpen) output. O.C. (Open Collect) offers NPN of C.E. output.


## SPECIFICATION

- ◆ Accuracy:  $\pm 0.1\%$  F.S.  $\pm 1$  digit (DC)  
 $\pm 0.2\%$  F.S.  $\pm 1$  digit (AC)
- ◆ Display Screen: High brightness red LED; 20.3mm(0.8")
- ◆ Sampling Time: 16 cycles / sec
- ◆ Display Range: -19999~99999
- ◆ Zero Adjustment: -19999~99999
- ◆ Over Range Indication: doFL / ioFL or -doFL / -ioFL
- ◆ Polarity Indication: Automatic with "-" indication
- ◆ Parameters Setting: Push buttons
- ◆ Back Up Memory: EEPROM
- ◆ Alarm Action: " $\geq$  (Hi) on" or "< (Lo) on"
- ◆ Alarm Run Delay Time: 0~99 sec
- ◆ Relay Contact: AC 277V / 7A; DC 30V / 7A
- ◆ Communication: RS-485 Modbus RTU mode
- ◆ Baud Rate: 19200 / 9600 / 4800 / 2400 bps
- ◆ Temperature Coefficient: 100ppm /  $^{\circ}\text{C}$  (0~60 $^{\circ}\text{C}$ )
- ◆ Operating Temperature: 0~60 $^{\circ}\text{C}$
- ◆ Operating Humidity: 20~90% RH (non-condensing)
- ◆ Storage Temperature: -10~70 $^{\circ}\text{C}$
- ◆ Storage Humidity: 20~90% RH (non-condensing)
- ◆ Power Supply: AC/DC 100~240V; DC 12 / 24 / 30~90V
- ◆ Power Consumption: 8.5VA (all functions output)
- ◆ Surge Test: 1.5kVac / 1min (Input / Power)
- ◆ Input Impedence: Voltage:  $>2\text{V}$  for 20K $\Omega$  / V;  $\leq 2\text{V}$  for  $>200\text{M}\Omega$   
Current:  $\geq 0.2\text{A}$  at 100mV;  $< 0.2\text{A}$  at 1V

## FRONT PANEL & KEY FUNCTIONS

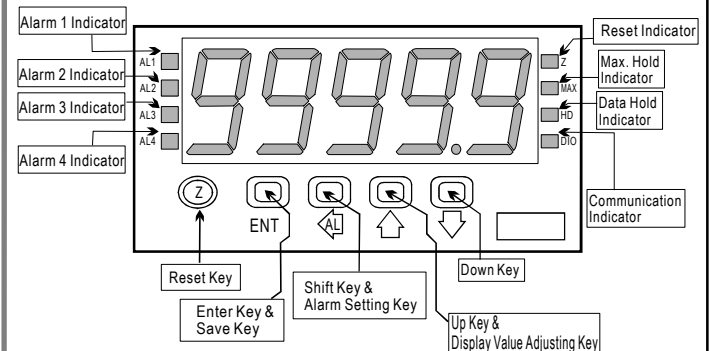

## DIMENSION

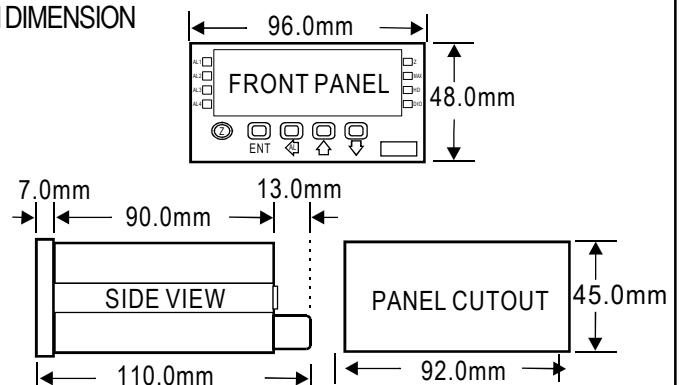

## WIRING CONNECTION

