

## Tinytag Talk 2 Temperature Logger (-40 to +85°C)

### TK-4014

#### Issue 1

14th August 2006  
E&OE

Tinytag Talk 2s are compact, lightweight, economical loggers housed in a 35mm film canister.

These loggers are used in a wide range of applications including fridge monitoring, building condition monitoring and academia.

The TK-4014 is self contained with an internal temperature sensor.


#### Popular Applications

- Building condition monitoring
- Pharmaceutical storage
- Dry food storage
- Museum display and repository



#### Features

- Temperature recorder
- 16,000 reading capacity
- High Accuracy
- High Reading Resolution
- Fast Data Offload
- 2 user-programmable alarms
- Low battery monitor
- User-replaceable battery






### Features

<b>Total Reading Capacity</b>	16,000 readings
<b>Memory type</b>	Non Volatile
<b>Delayed Start</b>	Relative / Absolute (up to 45 days)
<b>Stop Options</b>	When full After n Readings Never (overwrite oldest data)
<b>Reading Types</b>	Actual, Min, Max
<b>Logging Interval</b>	1 sec to 10 days
<b>Offload</b>	While stopped or when logging in minutes mode
<b>Alarms</b>	2 fully programmable; latchable

### Reading Specification

<b>Reading Range</b>	-40°C to +85°C (-40°F to +185°F)
<b>Sensor Type</b>	10K NTC Thermistor (Internally mounted)
<b>Response Time</b>	25 mins to 90% FSD in moving air
<b>Reading Resolution</b>	0.05°C or better
<b>Accuracy</b>	

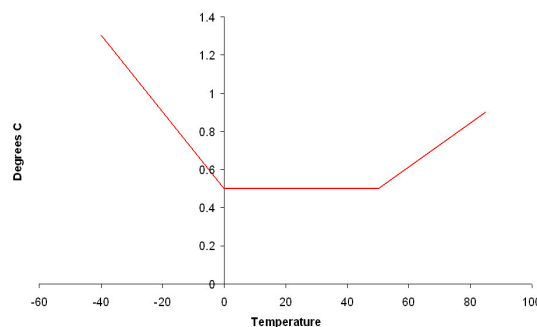

### Physical Specification

<b>IP Rating</b>	IP54 (splash-proof)
<b>Operational Range*</b>	-40°C to +85°C (-40°F to +185°F)
<b>Case Dimensions</b>	
<b>Diameter</b>	34mm / 1.34"
<b>Height</b>	54mm / 2.13"
<b>Weight</b>	30g / 1.06oz

\*The Operational Range indicates the physical limits to which the unit can be exposed, not the reading range over which it will record.

### Notes

**Battery Type** SAFT LS14250 or LST14250; Tekcell SBAA02P

The logger will operate with other ½AA 3.6V Lithium (Li-SOCI2) batteries but performance cannot be guaranteed.

**Replacement Interval** Annually

Before replacing the battery the data logger must be stopped.

Data stored on the logger will be retained after a battery is replaced.

If used at low temperatures the data logger should be allowed to warm to room temperature before it is opened to avoid condensation forming inside the unit.

### Calibration

This unit is configured to meet Gemini's quoted specification during its manufacture.

We recommend that the calibration of this unit should be checked annually against a calibrated reference meter.

A UKAS traceable certificate of calibration can be supplied for an additional charge either at the point of purchase, or if the unit is returned for a service calibration.

### Approvals

This equipment complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause any harmful interference, and (2) the device must accept any interference received, including interference that may cause undesired operation.

This product is manufactured by Gemini Data Loggers (UK) Ltd to BS EN ISO9001:2000 (Certificate No. 6134).



### Required and Related Products

To use this data logger you will also require one of the following pieces of software:

SWCD-0040: Tinytag Explorer software or  
SW-1500: Easyview Light software or  
SW-0500: Easyview Pro software

and a

CAB-0005: Tinytag Transit/Talk PC Serial Download Cable or  
CAB-0005-USB: Tinytag Transit/Talk USB Download Cable

Further related products:

SER-9510: Talk Service Kit