


DA-1805S Series

Features:

- . PBT Housing
- . Small Size
- . Detecting Distance: 5 mm
- . Upper Detecting

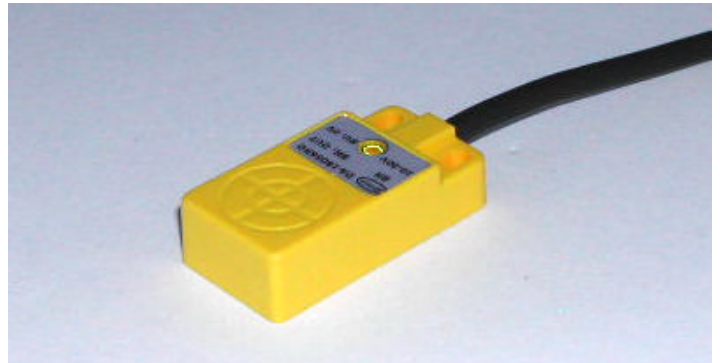

Specification:

Item	Type Model	NPN Ouput	PNP Output
		DA-1805SNO	DA-1805SPO
Max Detecting Distance		5 mm ± 10%	
Setting Detecting Distance		0 - 4 mm	
Standard Object		Iron 18 x 18 x 1t	
Hysteresis		15% of Setting Detecting	
Accuracy		± 10%	
Loop Protection		Reverse Protection Loop	
Power Supply		10-30V DC	
Load Current		150mA Max.	
Response Frequency		600Hz	
Indication		RED LED	
Protection		IP 67	
Vibration		10-55 Hz ; 1.5mm X,Y,Z continuous 2 hours	
Shock		500 m/S (50g) X, Y, Z continuous 3 times	
Operating Temperature		-25 to 70 ; Storage Temperature: -30 to 80	
Operating Humidity		35 to 85 % RH	
Housing Material		PBT resin + 30% fibre	
Wiring Material		PVC 3C/ 3.8 Ø * 2M	
Weight		62g	

Order Information:

DA-1805S X NO X - X
 1 2 3 4

1. Output : NONE: Current Output (Standard)
 R: Voltage Output
2. Output: Normal Open: NPN (NO) or PNP (PO)
 Normal Close: NPN (NC) or PNP(PC)
3. Power Supply: NONE: 10~30 Vdc (Standard)
 5V: 5 Vdc
4. Other: P : Socket
 3M: Wire 3M (5M: Wire 5M)

DA-1805S Series

Dimensions:

