

5-Digit, Microprocessor-based Panel Meter (with 1 x alarm)

AM5A-A

FEATURES

- Accuracy: $\pm 0.1\%$ F.S. ± 1 digit (DC / Potentiometer / Resistor / PT-100 / Load Cell)
 $\pm 0.2\%$ F.S. ± 1 digit (AC)
- Measuring AC, DC Voltage / AC, DC Current / Potentiometer / Resistor / PT-100 / Load Cell
- High brightness 0.56" LED display range: -19999~99999; decimal point selectable
- Reset and 1 alarm setting (Hi or Lo) programmable
- High stability, non-flammable case (PC), high safety
- CE approval



ORDER INFORMATION: AM5A-A- [Code 1] [Code 2] - [Code 3]


Code 1	Input Type	Code 2	Voltage	Code 2	Current	Code 2	Potentiometer	Code 2	Resistor	Code 2	RTD (PT-100)	Code 2	Load Cell	Code 3	Aux. Power
D	DC	V1	0~50mV	A1	0~20uA	P1	500 Ω ~10K Ω	I1	0~10 Ω	T1	-50~50 $^{\circ}$ C	L1	1mV/V EX.5V	A	AC 110/220V
A	AC AVG	V2	0~5V	A2	0~200uA	P2	10K Ω ~100K Ω	I2	0~100 Ω	T2	-100~100 $^{\circ}$ C	L2	2mV/V EX.5V		
M	AC TRMS	V3	1~5V	A3	0~2mA	P3	100K Ω ~1M Ω	I3	0~1K Ω	T3	-200~200 $^{\circ}$ C	L3	3mV/V EX.5V		
P	3 Wire Potentiometer	V4	0~10V	A4	0~20mA	PO	Option	I4	0~10K Ω	T4	0~600 $^{\circ}$ C	L4	1mV/V EX.10V		
I	2 Wire Resistor	V5	0~36V	A5	0~200mA			I5	0~100K Ω	TO	Option	L5	2mV/V EX.10V		
T	RTD (PT-100)	V6	0~300V	A6	4~20mA			IO	Option			L6	3mV/V EX.10V		
L	Load Cell	V7	0~600V	A7	0~2A							LO	Option		
2	2, 3 Wire Sensor	VO	Option	A8	0~5A										
4	4 Wire Sensor			A9	0~10A										
				AO	Option										

- **1: 2 wire type offers excitation power DC24V for 2 wire (Loop Power) pressure, temperature, humidity sensors using.
2: 3.4 wire type offers excitation power DC24V for 3, 4 wire (Loop Power) pressure, temperature, humidity sensors using.
3: Load Cell type of excitation power DC5V can have 2 load cell in parallel; DC10V only can offer 1 load cell to use.


SPECIFICATION

- ◆ Accuracy: $\pm 0.1\%$ F.S. ± 1 digit (DC / Potentiometer / Resistor / PT-100 / Load Cell)
 $\pm 0.2\%$ F.S. ± 1 digit (AC)
- ◆ Display Screen: High brightness red LED; 14.22mm(0.56")
- ◆ Sampling Time: 16 cycles / sec
- ◆ Display Rang: -19999~99999
- ◆ Zero Adjustment: -19999~99999
- ◆ Over Range Indication: doFL / ioFL or -doFL / -ioFL
- ◆ Polarity Indication: Automatic with "-" indication
- ◆ Parameters Setting: Push buttons
- ◆ Back Up Memory: EEPROM
- ◆ Alarm Action: " $\geq$ (Hi) on" or "< (Lo) on"
- ◆ Alarm Run Delay Time: 0~99 sec
- ◆ Relay Contact: AC 277V / 7A; DC 30V / 7A
- ◆ Temperature Coefficient: 100ppm / $^{\circ}$ C (0~60 $^{\circ}$ C)
- ◆ Operating Temperature: 0~60 $^{\circ}$ C
- ◆ Operating Humidity: 20~90% RH (non-condensing)
- ◆ Storage Temperature: -10~70 $^{\circ}$ C
- ◆ Storage Humidity: 20~90% RH (non-condensing)
- ◆ Power Supply: AC 110/220V $\pm 10\%$; DC 12 / 24 / 30~90V
- ◆ Power Consumption: 4.5VA
- ◆ Surge Test: 2KVac / 1min (Input / Power)
- ◆ Input Impedence: Voltage: $> 2V$ for 20K Ω / V; $\leq 2V$ for $> 200M\Omega$
Current: $\geq 0.2A$ at 100mV; $< 0.2A$ at 1V

FRONT PANEL & KEY FUNCTIONS

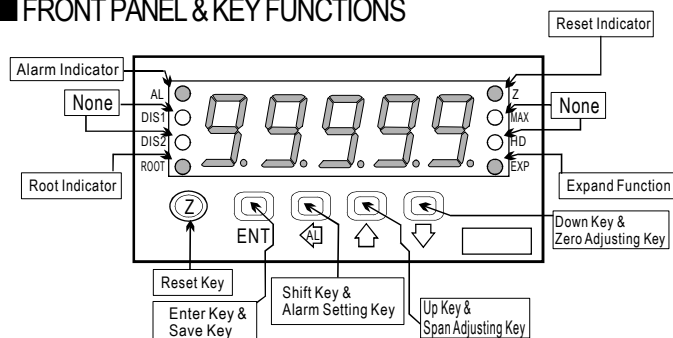


DIMENSION

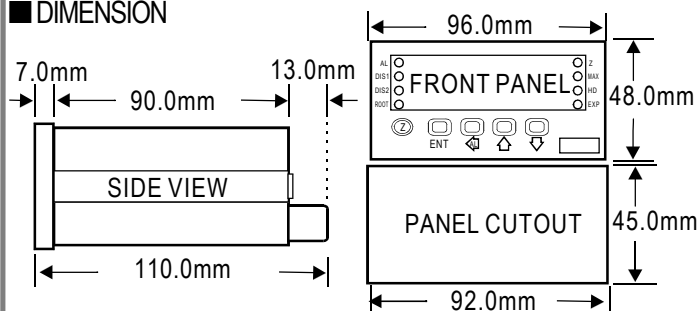


WIRING CONNECTION


● Voltage, Current (AC, DC)

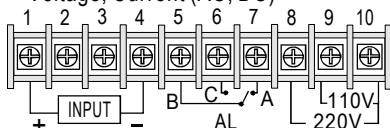


● Temperature (RTD)

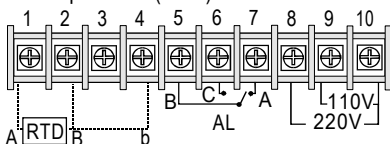


● 2 Wire Resistor

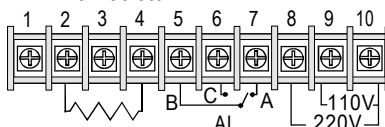

● 2,3 Wire Sensor

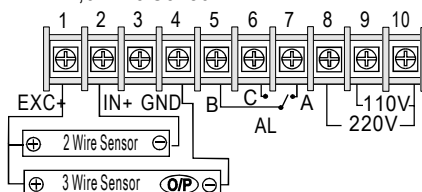

● 3 Wire Potentiometer

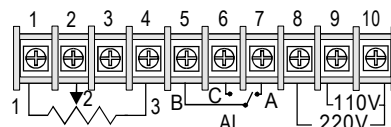

● 4 Wire Sensor or Load cell

