

CENTER 110 MULTIMETER



- Autoranging
- 3 3/4 Digits Display
- High Speed Bargraph
- Auto Power Off
- REL Function
- MAX MIN Function

CE IEC 1010 600V CAT II


CENTER®

CENTER 110 MULTIMETER

GENERAL SPECIFICATIONS

Sampling Rate: 2 times/sec for digital reading ;
20 times/sec for analog bar indication
Low Battery Indication: The  is displayed.
Auto Power Off: 30 minutes
Battery Life: 500 hours approx.(alkaline)
Battery Type: UM-4, Size AAA, 1.5V×2
Safety Category: IEC 1010 600V CAT II
Operating Condition: 0°C to 40°C (<80%RH)
Storage Condition: -10°C to 60°C (<70%RH)
Dimensions: 150×72×35mm (5.9"×2.8"×1.4")
Weight: Approx.220g
Accessories: Instruction Manual ,Test Lead, Fuse (0.5A), Battery1.5V×2

3-3/4 Digits Display

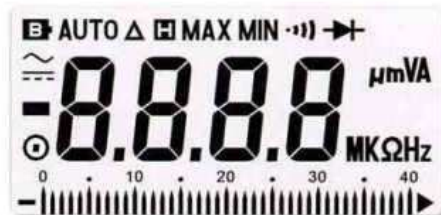

ELECTRICAL SPECIFICATIONS

Function	Range	Resolution	Accuracy
ACV	400mV	0.1mV	$\pm(1\%rdg+4dgt)$
	4V	0.001V	
	40V	0.01V	
	400V	0.1V	
	600V	1V	
DCV	400mV	0.1mV	$\pm(0.5\%rdg+2dgt)$
	4V	0.001V	
	40V	0.01V	
	400V	0.1V	
	600V	1V	$\pm(0.8\%rdg+2dgt)$
ACA	400uA	0.1uA	$\pm(1.3\%rdg+5dgt)$
	4000uA	1uA	
	40mA	0.01mA	
	400mA	0.1mA	$\pm(1.5\%rdg+5dgt)$
	10A	0.01A	
DCA	400uA	0.1uA	$\pm(1\%rdg+2dgt)$
	4000uA	1uA	
	40mA	0.01mA	
	400mA	0.1mA	
	10A	0.01A	$\pm(1.2\%rdg+3dgt)$
Ohms	400Ω	0.1Ω	$\pm(0.8\%rdg+2dgt)$
	4KΩ	1Ω	
	40KΩ	10Ω	
	400KΩ	100Ω	
	4MΩ	1KΩ	$\pm(1.2\%rdg+3dgt)$
	40MΩ	10KΩ	
Hz	4KHz	1Hz	$\pm(0.1\%rdg+1dgt)$
	40KHz	10Hz	
	400KHz	100Hz	
	4MHz	1KHz	
	40MHz	10KHz	
		Test Current: 1mA	
		Active Sound Level: $\leq 40\Omega$	



Hang Convenience

Built-in Tilt Stand



CENTER®

CENTER TECHNOLOGY CORP.

Distributed by:

